



OCM PONTOON CP-4088 - SPECIFICATION SHEET



This unit has the standard container dimension of 40' x 8' x 8' (12,190 x 2,436 x 2,438 m.) and is transportable by container vessel, train or trailer.

CP-4088

Dimensions	
Container dimension	40' x 8' x 8'
Length o.a.	12,190 m
Breadth o.a.	2,436 m
Depth o.a.	2,438 m
Draft max.	2,100 m
Load capacity max.	52 tn
Deckload	± 4 tm 2
Weight	± 11,500 kg

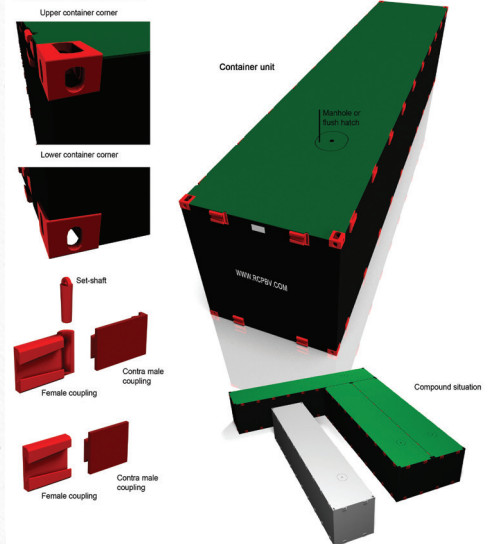

PONTOONS

28 NO ROAD TRANSPORTABLE UNITS

GENERAL

28 No Ravestein Pontoon Units

VESSEL PARTICULARS (Each Pontoon)

15 Pontoons Available Length 12.1m

Breadth 2.436m

Depth 2.438m (8ft)

Max Draft 2.1m

Load Capacity 52tn

Deck load 5T/m²

Total Deck Area 435m²

WEIGHT

Weight 11.5T Each

ADDITIONAL INFORMATION

2No 24m Spud legs

Hydraulic Spud Legs Operation

Road Transportable

Pontoon arrangement can be reconfigured to specific project requirements.

Suitable arrangement for Dredging, Piling or Crane Barge with 120t excavator or 300t crawler crane capacity

